


# Disassembly instructions and screw map for replacing a hard drive in an eMac.

Print out this document and tape screws in appropriate places as you go.

1. Remove 6 hex head screws from sides and top.

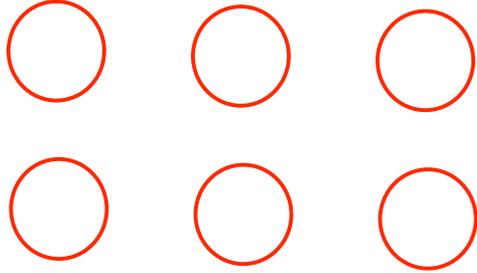


Remove one hex head screw, two feet with Phillips screws, and one Phillips screws from access panel. Remove access panel. Partially remove white plastic cover halfway, then carefully disconnect cable from power




2. Remove 4 Phillips screws.

Remove metal shield.

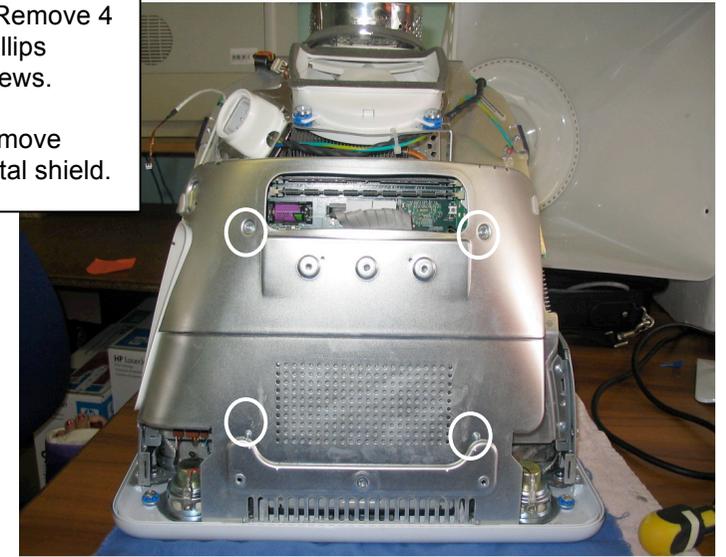

4. Remove processor board (9 screws). Unhook power button cable from the side, undo one plug near the top and four small plugs at the bottom before attempting to remove. Gently pull the processor board forward and lay it down.

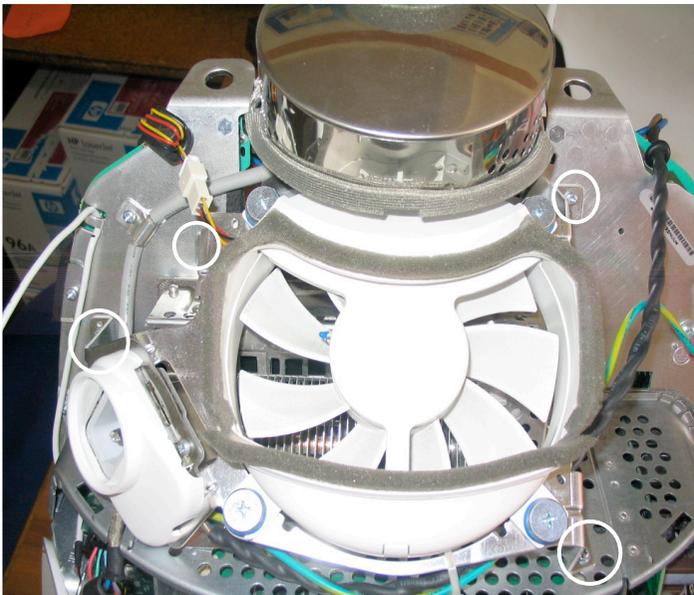

3. Remove fan and housing (4 screws). Do not fully disconnect fan and bracket, just hang off to the right, out of the way.



5. Remove four screws holding hard drive into bracket. Disconnect power and connector cables.